Technical Report Profile DEKORP 1990-3A (incl. Q12-Q16) - Reprocessing

(Manfred Stiller & Tatiana Agafonova, GFZ German Research Centre for Geosciences, Potsdam, Germany)

1. Introduction

This is the technical description of new DEKORP 1990-3A seismic reflection data as reprocessed in 2019/20. It builds an addition to the data publication Stiller et al. (2021), which encompasses the first processing of the DEKORP Processing Centre carried out in 1991. The trace data come in SEGY format, the description of which can be found in the References, SEG Technical Standards: SEGY rev0 (1975); rev1 (2002).

When using the data please cite:

Homuth, Benjamin; Stiller, Manfred (2022): Reprocessed deep seismic reflection profile DEKORP 1990-3A across the Hessian Depression, Northwest Germany. GFZ Data Services. http://doi.org/10.5880/GFZ.DEKORP-3A.002

Table of Contents

2. General

The folders **DEK90-3A_RData** and **DEK90-3A-Q_RData** contain all seismic data and corresponding metadata as well as additional information like e.g. high-resolution graphic representations of the reprocessing results from 2019/20. All data are based on the original field data and on the processing carried out in 1991 at the former DEKORP Processing Centre (DPC) at the Geophysical Institute of the Technical University Clausthal, Germany and have been reprocessed by DMT Petrologic GmbH & Co. KG, Hanover, Germany, supervised by the GFZ Potsdam, Germany (see the corresponding Reprocessing Report and the related FlowCharts coming with the metadata). It is recommended to have also a look at the data publication of the original processing from 1991 (Stiller et al. 2021) which contains a lot of additional information also with respect to the reprocessing results. Other DEKORP profiles can be found in Meissner & Bortfeld (1990) and a basic introduction to the processing of DEKORP data in Stiller & Thomas (1989).

The southernmost 104 km of the 128 km long profile 3A, i.e. the part located in the State of Hesse, were reprocessed on behalf of the Hessian Agency for Nature Conservation, Environment and Geology. The input data were extended northwards by another 9 km (with decreasing CDP coverage) in order to avoid boundary effects during migration. As a particularity, also a set of 6 cross-profiles, each ca. 9.6 km in length and

perpendicular to the main line, were surveyed along DEKORP 3A to get information about possible cross-dips. Five of those short cross-lines (Q12-Q16) were reprocessed in 2D and 3D as well.

All provided SEGY files are IEEE-32bitFP rev1 with proper binary header. Corresponding downloadable SEGY format descriptions in PDF can be found in the References, SEG Technical Standards: SEGY rev0 (1975); rev1 (2002). In the following, as an example, the EBCDIC header for the final pre-stack depth-migrated section is given, containing several useful information. This also supports an easy set-up for the SEGY input routine of any other software:

```
                        SEG-Y Reel Header
_____________________________________________________
C 1 Client:     HLNUG, Wiesbaden, Germany
C 2 Contractor: DMT Petrologic GmbH & Co. KG, Hanover, Germany
C 3 Date:       2019-03-04
C 4 Project:    2D Seismic Reprocessing DEKORP, Line DEK90-3A
C 5 Content:    CRS Pre-Stack Depth Migration, Filtered and Scaled, Zerophase
C 6             CDP 613-5122, Sampling Rate: 4m, Length: 45000m
C 7 Polarity:   Impedance Increase = Negative Value
C 8 Geodetic Reference: DHDN / 3-Degree Gauss-Kruger Zone 3 (EPSG: 31467)
C 9 Processing Sequence:
C10  1)  Data Input
C11  2)  Binning and Geometry Load
C12  3)  Minimum Phase Transformation of Vibroseis Data
C13  4)  Initial Trace Editing
C14  5)  Refraction Statics (Delivered by Client, SRD=500m AMSL)
C15  6)  Spherical Divergence Correction (T*VV)
C16  7)  1st Run Surface Consistent Amplitude Balancing
C17  8)  Surface Consistent Spiking Deconvolution (160ms, 1.0% Prewhitening, Two
C18      Gates)
C19  9)  Bandpass (6Hz-12Hz-48Hz-60Hz)
C20 10)  2nd Run Trace Editing and Surface Consistent Amplitude Balancing
C21 11)  Air Blast Attenuation (331m/s)
C22 12)  Residual Statics Computation, including Iterative Velocity Updates
C23 13)  Noisy Trace Editing (Despike by Standard Deviation) in Supergathers
C24 14)  Ground-Roll Suppression in Cone Window
C25 15)  CRS Processing
C26 16)  Transformation to Zero-Phase
C27 17)  Isotropic Kirchhoff Pre-Stack Depth Migration 50 Degree Operator
C28      with iterative Velocityfield Update
C29 18)  Residual Moveout Correction, Outer Trace Mute and Stacking
C30 19)  Poststack Noise Cleaning: Coherence Enhancement with
C31      F-K Amplitude Power and Time-Variant Scaling
C32 20)  SEG-Y Output
C33 Trace Header Byte Positioning: SEG-Standard SEGY Rev 1, May 2002
C34 Bin-Center X-Coord   181-184 4I      Bin-Center Y-Coord  185-188 4I
C35 Bin-Center X-Coord     73-76 4I      Bin-Center Y-Coord    77-80 4I
C36 Bin-Center X-Coord     81-84 4I      Bin-Center Y-Coord    85-88 4I
C37 CDP Bin Number         21-24 4I      CDP Bin Number      193-196 4I
C38 Bin-Center Elevation 233-236 4I      CDP Location Number 237-240 4I
C39 SEG Y REV1
C40 END EBCDIC
```

2.1. Folder structure DEK90-3A_RData and DEK90-3A-Q_RData

SeismicData	PreStack	ShotGathers_unmigrated	Raw
		CDPgathers_unmigrated	Preprocessed
		CRSgathers_unmigrated	Processed
		ImageGathers_migrated	PreStackTime
			PreStackDepth
	PostStack	CRSstacks_unmigrated	Raw
			Final
			RMSvelocities
		PostStack_time-migrated	Raw
			Final
			IntervalVelocities
		PreStack_time-migrated	Raw
			Final
			RMSvelocities
		PreStack_depth-migrated	Raw
			Final
			IntervalVelocities
	Inversion	Tomography	VelocityField_unmuted
			VelocityField_muted
			NodeCount

GraphicData	FinalStacks
	FinalMigrations
	SeismicAttributes
	Tomography

MetaData	Geometry	Sources
		Receivers
		CDPs
		Relation
		Misc
	SurveyData	FieldReport
		Maps
		Statics
		Misc
	Misc	

In a PDF document in the **DEK90-3A_RData** and **DEK90-3A-Q_RData** parent folder all files contained in the subfolders are listed together with additional information for a full overview.

3. Seismic Data

The seismic trace data comprise all reprocessed results that are most likely required for further evaluation. They are divided into **PreStack** and **PostStack** data. The reprocessed post-stack data are well suited for getting a structural overview or for reinterpretation of the profile. The reprocessed pre-stack data allow for an application of new stacking or migration methods on raw or pre-processed data.

In the SeismicData/**PreStack** folder there is a set of SGY files, containing the unstacked and unmigrated gathers at different processing stages: as **FF/Chan-sorted raw** data, as **CDP/offset-sorted pre-processed** data ready for application of dynamic corrections, and as **CDP/offset-sorted CRS-processed** data ready for stack and/or migration. The CRS processing (Common Reflection Surface) gives a significant improvement in comparison to the classical CDP processing with NMO (Common Depth Point with Normal MoveOut). In addition, there are also **CDP/offset-sorted image gathers,** either **pre-stack time-migrated** or **pre-stack depth-migrated** available.

The respective file names are self-explaining. All information that is necessary for recording geometry definition should be already present in the headers (source-/receiver-/CDP locations/coordinates/elevations/static corrections, shot/channel numbers, offsets etc.), so it should be easily possible to set up a matching database by extracting them accordingly. The PDF document in the parent folder lists all SGY files again together with additional information.

In the SeismicData/**PostStack** folder there are SGY files with the final results from the reprocessing carried out in 2019/20, they are arranged in subfolders according to the respective poststack processing stage, i.e. **unmigrated**, **post-stack time-migrated**, **pre-stack time-migrated** and **pre-stack depth-migrated**. Each version comes as **raw stack** (nearly true-amplitude), **final stack** (after additional semblance-based amplitude scaling for better readability) and together with the used **velocity model**.

A **Tomographic Inversion** has been conducted, based on the first-break picks of the raw data. This delivers a high-resolution image of the true interval-velocities versus depth down to 3-5 km below surface. The folder contains the derived **VelocityField (1) unmuted** and **(2) muted** to the reliable region, based on the corresponding **NodeCount** result. The tomographic velocities have also partly been used for the final migrations to obtain a better near-surface imaging.

The PDF document in the parent folder lists all SGY files again together with additional information.

4. Graphic Data

The folder **GraphicData** contains graphic representations of the reprocessing results. The sections have been converted from SEGY to color-coded high-resolution PDF which can be displayed or plotted with common software that is able to handle images with 25 000 pixels and more. The images come with top label (showing profile-km and CDP) and with a basic side label (showing profile name and processing version).

The **GraphicData** folder structure is analogous to the **SeismicData** folder. It contains in the subfolders **FinalStacks**, **FinalMigrations** and **Tomography** the respective reprocessed results, sometimes in different versions. There is no graphic representation of unstacked data.

The file names correspond to the seismic data versions and should be therefore self-explaning. The PDF document in the parent folder lists all PDF files again together with additional information.

5. Metadata

In the folder **MetaData** there is accompanying information to the seismic data. The subfolder **SurveyData** contains scans of the original (PRAKLA) field report including appendices as well as the original location maps and the original evaluation of field static corrections. The scans might be overlapping and have not been merged together as they are slightly distorted by the optical scanning procedure from blueprints. Unfortunately, everything is in German language, but they are hopefully of help nevertheless.

In the subfolder **Geometry** there are ASCII tables with all source-/receiver-/CDP-location/-coordinates/-elevation, spread and static information, just in case, that for one or the other file something, e.g. the CDP coordinates, might be missing in the trace headers and have to be externally imported. The tables for **Receivers**, **Sources**, **CDP**s, the **Relation** describing the actually active spread and **Misc** (like additional particulars like static corrections if not included in the other files) are self-explaining by the first comment line in each file. The coordinates are given in the rectangular Gauß-Krüger system (Bessel ellipsoid), the used

abbreviations are LOCN (geophone location), SPON (shotpoint order number), SLOC (source location), NSPON (nearest SPON to CDP), NLOC (nearest LOCN to CDP) and VEL (either weathering layer velocity or main refractor velocity in m/s). For import into maps or GIS the CDP line is additionally given in geographic coordinates (Longitude, Latitude, WGS84) in ASCII and kml format. The PDF document in the parent folder lists all Metadata files again together with additional information.

In **Appendix A** a GoogleEarth-based map helps to localize naming and position of the individual seismic lines/areas. Finally, the field parameters and geometry dimensions are compiled in ***Tables 1a, b, c*** and the general sequence of the reprocessing in ***Table 2***.

6. References

https://seg.org/Portals/0/SEG/News and Resources/Technical Standards/seg_y_rev0.pdf

https://seg.org/Portals/0/SEG/News and Resources/Technical Standards/seg_y_rev1.pdf

Meissner, R. & Bortfield, R.K. (Eds.) (1990). DEKORP-Atlas – Results of Deutsches Kontinentales Reflexionsseismisches Programm. Springer Press. https://doi.org/10.1007/978-3-642-75662-7

Stiller M. & Thomas, R. (1989). Processing of reflection-seismic data in the DEKORP Processing Center, Clausthal. In: Emmermann, R. & Wohlenberg, J. (Eds). The German Continental Deep Drilling Program (KTB). Springer Press, pp 177-232. https://doi.org/10.1007/978-3-642-74588-1_9

Stiller, M.; Kaerger, L.; Agafonova, T.; Krawczyk, C.; Oncken, O.; Weber, M.; Former DEKORP Project Leaders; Former DEKORP Research Group; Former DEKORP Processing Centre (2021): Deep seismic reflection profile DEKORP 1990-3A across the Hessian Depression, Northwest Germany. GFZ Data Services. http://doi.org/10.5880/GFZ.DEKORP-3A.001

7. Appendix A

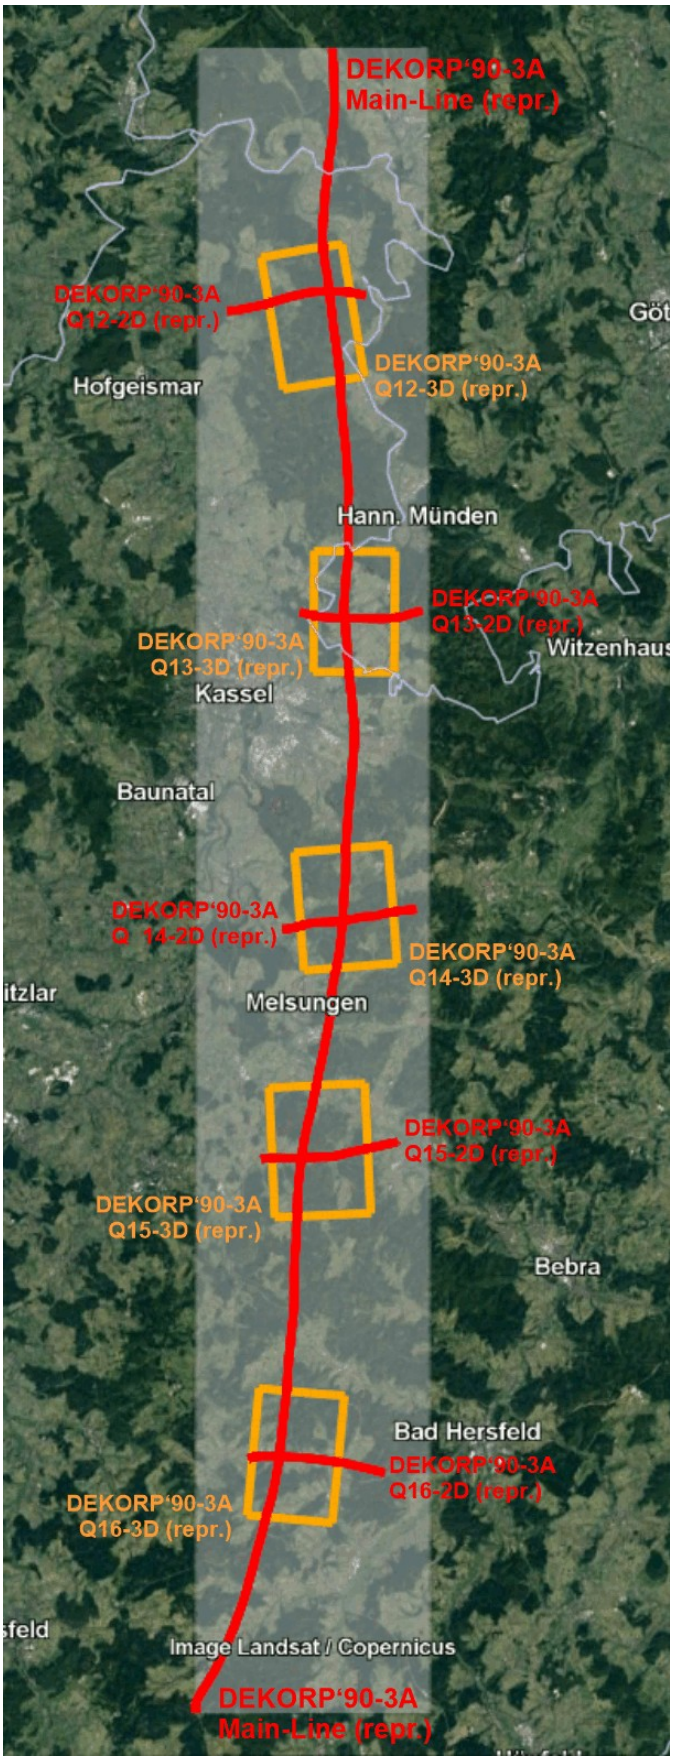

GoogleEarth-based location map showing position and naming of the different reprocessed DEK'90-3A lines and areas, consisting of Main-line (red), Q12-2D to Q16-2D (red) and Q12-3D to Q16-3D (orange).

7.1. *Table 1a:* Field parameter summary and geometry dimensions (Main-Line)

General information	**Recorded**	August 1990
	by	Prakla-Seismos AG
	for	Geological Survey of Lower Saxony, Germany
	Area	Hesse
	Profile length / direction / azimuth	Reprocessed 112.75 km of total 128.025 km / N – S / -92.3364 °
	Total data amount	4.81 GB of total 8.3 GB
Recording	**Recording system**	Sercel SN 368 / MTC01
	Sample interval	4 ms
	No. of channels	320
	Field filter	Low-cut 12.0 Hz / 18 dB High-cut 88.8 Hz / 72 dB
	Noise reduction	Automatic noise-mute before correlation
	Correlation	with filtered sweep
	Recording format	SEG-D
	Sweep + listening time **Recording time**	20 s + 14 s = 34 s (uncorrelated) 14 s (correlated)
Receivers	**Geophone type**	SM 4 (10 Hz)
	Geophones per group	24
	Receiver array	In-line array
	Group spacing	50 m
	Spread length	16 km
	No. of geophone points	2633 (entire profile)
Sources	**Source type**	Vibroseis (p-waves)
	No. of vibrators	5*VVEA (each 19.4 tons, 125 kN peak-force)
	Sweep length / range	20 s / 12 – 48 Hz
	Pattern length	50 m
	Vertical stacking rate	6-fold
	Recording configuration	Symmetrical split-spread (8075 – 125 – VP – 125 – 8075 m)
	Source point spacing	100 m
	No. of source points	1281 (entire profile)
CDPs	**Coverage (theor. / real)**	80-fold / 71-fold
	CDP-spacing	25 m
	No. of CDPs	4510 (reprocessed part) of 5122 in total
	Final datum	500 m a.s.l.

Geometry dimensions DEKORP 1990-3A / Main-Line

	Record	**Location**	**X coordinate**	**Y coordinate**	**Longitude**	**Latitude**
			Gauss-Krueger (Bessel, Potsdam)		**Decimal degree (WGS84)**	
Source	**(** 1	1059	3539163.	5743483.	9.56696335	51.82408648 **)**
	1281	3629	3531649.	5618455.	9.44693530	50.70078382
Receiver	**(** 1	998	3539814.	5746422.	9.57674266	51.85045378 **)**
	2633	3630	3531375.	5618451.	9.44305670	50.70076269
CDP	**613**	**1341**	3539779.	5729671.	9.57431835	51.69991085
	5122	3629	3531493.	5618507.	9.44473167	50.70125971

Table 1b: Field parameter summary and geometry dimensions (Q-Lines 2D)

General information	**Recorded**	August 1990
	by	Geological Survey of Lower Saxony (recording, receivers), Prakla-Seismos AG (sources)
	for	Geological Survey of Lower Saxony, Germany
	Area	Hesse
	Line: profile length / direction / azimuth / data amount (correlated)	**Q12-R$_{2D}$:** 9.44 km / W – E / 9.29613 ° / 13.36 MB **Q13-R$_{2D}$:** 8.28 km / W – E / 0.67303 ° / 11.48 MB **Q14-R$_{2D}$:** 9.08 km / W – E / 8.80996 ° / 13.36 MB **Q15-R$_{2D}$:** 9.24 km / W – E / 7.43787 ° / 13.36 MB **Q16-R$_{2D}$:** 9.24 km / W – E / -6.19012 ° / 13.36 MB
	Profile length in total / total data amount	45.28 km / 64.92 MB
	Q-line spacing	~20 km along main-line
Recording	**Recording system**	Texas Instrument DFS V
	Sample interval	4 ms
	No. of channels	120
	Field filter	High-cut 90 Hz / 70 dB Notch 50 Hz
	Recording format	SEG-B
	Sweep + listening time **Recording time**	20 s + 13.792 s = 33.792 s (uncorrelated) 14 s (correlated with filtered sweep)
Receivers (per Q-line set-up)	**Geophone type**	SM 4 B (10 Hz)
	Geophones per group	12
	Receiver array	In-line array
	Group spacing	80 m
	Spread length	9.52 km
	No. of geophone points	120
Sources (per Q-line set-up)	**Source type**	Vibroseis (p-waves)
	No. of vibrators	5*VVEA (each 19.4 tons, 125 kN peak-force)
	Sweep length / range	20 s / 12 – 48 Hz
	Pattern length	50 m
	Vertical stacking rate	5-fold
	Recording configuration	Few VPs within 9520 m fixed spread
	Source point spacing	~1200 m
	No. of source points	8 (Q13 only 7 source points)
CDPs (per Q-line set-up)	**Coverage**	Fold 1-8
	CDP-spacing	40 m
	Line: no. of CDPs	**Q12-R$_{2D}$:** 237 **Q13-R$_{2D}$:** 208 **Q14-R$_{2D}$:** 222 **Q15-R$_{2D}$:** 232 **Q16-R$_{2D}$:** 232
	Final datum	500 m a.s.l.

Geometry dimensions DEKORP 1990-3A / Q-2D

Q12-2D (R)

	Record	Location	X coordinate	Y coordinate	Longitude	Latitude
			Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source	411	106	3533078.	5712070.	9.47573817	51.54215393
	419	225	3542316.	5713126.	9.60901567	51.55102864
Receiver	1	101	3532678.	5712080.	9.46997365	51.54226707
	120	220	3541927.	5713224.	9.60341947	51.55193842
CDP	211	105	3532873.	5712075.	9.47278096	51.54221084
	447	223	3542131.	5713173.	9.60634710	51.55146491

Q13-2D (R)

	Record	Location	X coordinate	Y coordinate	Longitude	Latitude
			Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source	581	116	3538448.	5691841.	9.55094322	51.36000028
	587	208	3545600.	5692033.	9.65364182	51.36119755
Receiver	1	101	3537343.	5692257.	9.53512321	51.36381287
	120	220	3546538.	5692232.	9.66713401	51.36291014
CDP	231	115	3537891.	5692008.	9.54302637	51.36190687
	438	219	3546065.	5692131.	9.66658740	51.36284134

Q14-2D (R)

	Record	Location	X coordinate	Y coordinate	Longitude	Latitude
			Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source	760	106	3537081.	5670793.	9.52913870	51.17090946
	767	219	3545785.	5672175.	9.65375743	51.18270120
Receiver	1	101	3536691.	5670858.	9.52356932	51.17151882
	120	220	3545851.	5672287.	9.65471556	51.18370257
CDP	211	105	3536891.	5670850.	9.52643083	51.17142956
	438	219	3545830.	5672252.	9.65440356	51.18338522

Q15-2D (R)

	Record	Location	X coordinate	Y coordinate	Longitude	Latitude
			Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source	854	106	3535790.	5655606.	9.50917690	51.03448504
	862	219	3544697.	5656778.	9.63629272	51.04439643
Receiver	1	101	3535422.	5655434.	9.50391410	51.03296179
	120	220	3544754.	5656580.	9.63708101	51.04261232
CDP	211	105	3535601.	5655497.	9.50647192	51.03351702
	442	221	3544709.	5656744.	9.63645957	51.04408540

Q16-2D (R)

	Record	Location	X coordinate	Y coordinate	Longitude	Latitude
			Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source	1017	104	3534935.	5635717.	9.49508346	50.85576244
	1024	217	3543889.	5634589.	9.62210169	50.84501395
Receiver	1	101	3534796.	5635430.	9.49308229	50.85319103
	120	220	3544121.	5634607.	9.62539764	50.84515813
CDP	207	103	3534888.	5635510.	9.49439631	50.85390460
	438	219	3544004.	5634634.	9.62373694	50.84540973

Table 1c: Field parameter summary and geometry dimensions (Q-Lines 3D)

General information	**Recorded**	August 1990
	by	Geological Survey of Lower Saxony (recording, receivers), Prakla-Seismos AG (sources)
	for	Geological Survey of Lower Saxony, Germany
	Area	Hesse
	Line: area / in-line direction / azimuth / data amount (correlated, all traces)	**Q12-R$_{3D}$:** 49.680 km^2 / N – S / -80.0009 ° / 245.18 MB **Q13-R$_{3D}$:** 44.064 km^2 / N – S / -90.0000 ° / 200.31 MB **Q14-R$_{3D}$:** 49.926 km^2 / N – S / -85.0003 ° / 233.70 MB **Q15-R$_{3D}$:** 56.028 km^2 / N – S / -86.9990 ° / 262.06 MB **Q16-R$_{3D}$:** 49.536 km^2 / N – S / -95.0011 ° / 253.73 MB
	Areas in total / total data amount	249.234 km^2 / 1.195 GB
	Area spacing	~20 km along main-line
Recording	**Recording system**	Texas Instrument DFS V
	Sample interval	4 ms
	No. of channels	120
	Field filter	High-cut 90 Hz / 70 dB Notch 50 Hz
	Recording format	SEG-B
	Sweep + listening time **Recording time**	20 s + 13.792 s = 33.792 s (uncorrelated) 14 s (correlated with filtered sweep)
Receivers (per Q-line set-up)	**Geophone type**	SM 4 B (10 Hz)
	Geophones per group	12
	Receiver array	In-line array
	Group spacing	80 m
	Spread length	9.52 km
	No. of geophone points	120
Sources (per Q-line set-up)	**Source type**	Vibroseis (p-waves)
	No. of vibrators	5*VVEA (each 19.4 tons, 125 kN peak-force)
	Sweep length / range	20 s / 12 – 48 Hz
	Pattern length	50 m
	Vertical stacking rate	5-fold
	Recording configuration	Main-line VPs recorded with 9520 m fixed spread
	Source point spacing	~50 m
	Line: no. of source points	**Q12-R$_{3D}$:** 147 **Q13-R$_{3D}$:** 119 **Q14-R$_{3D}$:** 140 **Q15-R$_{3D}$:** 154 **Q16-R$_{3D}$:** 152
CDPs (per Q-line set-up)	**Coverage**	single-fold
	CDP-bin size (in-line * cross-line)	50 m * 40 m
	Line: live in-lines / cross-lines / no. of CDPs	**Q12-R$_{3D}$:** 98-235 / 57-236 / 24840 **Q13-R$_{3D}$:** 47-182 / 78-239 / 22032 **Q14-R$_{3D}$:** 51-207 / 89-247 / 24963 **Q15-R$_{3D}$:** 44-204 / 95-268 / 28014 **Q16-R$_{3D}$:** 13-156 / 92-263 / 24768
	Final datum	500 m a.s.l.

Geometry dimensions DEKORP 1990-3A / Q-3D

Q12-3D (R)

		Record	Location	X coordinate	Y coordinate	Longitude	Latitude
				Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source		335	1559	3538655.0	5719000.0	9.55688353	51.60408403
		490	1899	3541107.0	5702179.0	9.59031261	51.45273015
Receiver		1	101	3532678.0	5712080.0	9.46997365	51.54226707
		120	220	3541927.0	5713224.0	9.60341947	51.55193842
CDP	*First Line*	34007	-	3535132.8	5715656.5	9.50571299	51.57426428
		34186	-	3536687.0	5706842.0	9.52721311	51.49494342
	Last Line	81957	-	3540529.5	5716608.0	9.58366223	51.58245429
		82136	-	3542083.8	5707794.0	9.60503207	51.50312419

Q13-3D (R)

		Record	Location	X coordinate	Y coordinate	Longitude	Latitude
				Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source		491	1945	3541160.0	5699858.0	9.59080550	51.43186577
		619	2259	3541756.0	5684583.0	9.59758381	51.29453288
Receiver		1	101	3537343.0	5692257.0	9.53512321	51.36381287
		120	220	3546538.0	5692232.0	9.66713401	51.36291014
CDP	*First Line*	14338	-	3538827.8	5696080.5	9.55685841	51.39807863
		14499	-	3538827.8	5688030.5	9.55598068	51.32572592
	Last Line	56188	-	3544227.8	5696080.5	9.63444529	51.39768387
		56349	-	3544227.8	5688030.5	9.63344542	51.32533218

Q14-3D (R)

		Record	Location	X coordinate	Y coordinate	Longitude	Latitude
				Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source		620	2340	3541551.0	5680647.0	9.59418796	51.25917115
		759	2645	3540623.0	5665521.0	9.57918590	51.12328333
Receiver		1	101	3536691.0	5670858.0	9.52356932	51.17151882
		120	220	3545851.0	5672287.0	9.65471556	51.18370257
CDP	*First Line*	15589	-	3537668.5	5675968.5	9.53808065	51.21738955
		15747	-	3538357.0	5668098.5	9.54709535	51.14660661
	Last Line	63949	-	3543884.8	5676512.5	9.62711267	51.22183568
		64107	-	3544573.0	5668642.5	9.63598756	51.15104645

Q15-3D (R)

		Record	Location	X coordinate	Y coordinate	Longitude	Latitude
				Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source		768	2666	3540101.0	5664549.0	9.57162242	51.11458347
		933	3007	3537851.0	5647981.0	9.53776352	50.96581587
Receiver		1	101	3535422.0	5655434.0	9.50391410	51.03296179
		120	220	3544754.0	5656580.0	9.63708101	51.04261232
CDP	*First Line*	15145	-	3536082.0	5660275.0	9.51380432	51.07643388
		15318	-	3536534.8	5651638.0	9.51939527	50.99877187
	Last Line	71145	-	3542473.2	5660610.5	9.60503451	51.07901258
		71318	-	3542926.0	5651972.5	9.61047318	51.00133780

Q16-3D (R)

		Record	Location	X coordinate	Y coordinate	Longitude	Latitude
				Gauss-Krueger (Bessel, Potsdam)		Decimal degree (WGS84)	
Source		934	3077	3537878.0	5644420.0	9.53777792	50.93380578
		1093	3416	3534971.0	5628106.0	9.49487008	50.78734624
Receiver		1	101	3534796.0	5635430.0	9.49308229	50.85319103
		120	220	3544121.0	5634607.0	9.62539764	50.84515813
CDP	*First Line*	4172	-	3535570.5	5640269.0	9.50455034	50.89664050
		4343	-	3534825.2	5631751.5	9.49314788	50.82012392
	Last Line	52792	-	3541268.8	5639770.0	9.58548521	50.89177663
		52963	-	3540523.5	5631253.0	9.57395178	50.81527282

7.2. *Table 2:* Reprocessing sequence summary (Main-line, Q-Lines 2D & 3D)

Process	Parameter
Data Output 1	*Input data, raw FF-sorted gathers*
Geometry Extraction	CDP assignment (Main-Line & Q-Lines 2D: Crooked-Line, Q-Lines 3D: 3D-Binning)
Correlation noise suppression	Despiking on uncorrelated data plus subsequent Sweep Correlation (only Q-Lines 2D & 3D)
Minimum-Phase Transformation	Operator designed from sweep autocorrelation
Trace Editing	Initial Bad-Trace Elimination
Analytic Gain	Spherical Divergence Correction (T^2)
First-Break Muting	Offset-dependent
Amplitude Balancing	Surface-consistent, 1st run
Deconvolution	Surface-consistent spiking (160 ms operator length, 1 % prewhitening, two gates)
Bandpass Filtering	6/12 – 48/60 Hz (additional 16⅔ Notch-filter on Q-Lines 2D & 3D)
Air-Blast Attenuation	Constant fan 333 m/s
Amplitude Balancing	Surface-consistent, 2nd run with additional bad-trace elimination
Static Correction	To Floating Datum (smoothed receiver elevation)
Velocity Analysis	1st pass, integrated method
Residual Static Correction	Surface-Consistent, including Iterative Velocity Updates
Velocity Analysis	2nd pass, integrated method
Noisy Trace Editing	Despiking by Standard Deviation in Supergathers
Ground-Roll Suppression	Cone Window
Data Output 2	*Preprocessed CDP-sorted gathers*
CRS-Processing	Common Reflection Surface method
Data Output 3	CRS-processed CDP-sorted gathers
Post-NMO/CRS Muting	Exclude refraction residuals
CDP Stacking	with shift to Final Datum (500 m a.s.l.) and Zero-Phase Transformation Coverage: Main-Line ~80-fold, Q-Lines 2D max 8-fold, Q-Lines 3D single-fold
Coherency Enhancement	Dip attenuation, f-k Filtering, f-x Deconvolution, bandpass Filtering
Data Output 4 a, b, c	CRS Stack (raw) *and semblance-scaled for dynamic compression (final) + velocities*
Migration	Post-Stack Steep-Dip Finite-Differences Method ***Input is the CRS Stack***
Data Output 5 a, b,c	*Post-Stack Time-Migration (raw) and semblance-scaled for dynamic compression (final) + velocities*

Migration	Pre-Stack Curved-Ray Kirchhoff Time-Migration (with iterative Velocity Field Update) ***Input are the unstacked CRS gathers***
Post-Migration Muting	Exclude noise residuals
Output 6	*Pre-Stack Time-Migrated CDP-sorted image gathers*
CDP Stacking	with shift to Final Datum (500 m a.s.l.) and Zero-Phase Transformation Coverage: Main-Line ~80-fold, Q-Lines 2D max 8-fold, Q-Lines 3D single-fold
Coherency Enhancement	Dip attenuation, f-k Filtering, f-x Deconvolution, Bandpass Filtering
Output 7 a, b, c	*Pre-Stack Time-Migration (raw) and semblance-scaled for dynamic compression (final) + velocities*

Depth-Model Building	Start model: First-Break Tomo vels + PreSTM vels + GFZ crustal vels ***Input are the unstacked CRS gathers after Zero-Phase Transformation***
Migration	Pre-Stack Isotropic Kirchhoff Depth-Migration (with iterative Velocity Field Update)
Post-Migration Processing	Residual Moveout Correction and Outer Trace Muting
Output 8	*Pre-Stack Depth-Migrated CDP-sorted image gathers*
CDP Stacking	with shift to Final Datum (500 m a.s.l.) and Zero-Phase Transformation Coverage: Main-Line ~80-fold, Q-Lines 2D max 8-fold, Q-Lines 3D single-fold
Coherency Enhancement	Dip attenuation, f-k Filtering, f-x Deconvolution, Bandpass filtering (application in time domain)
Output 9 a, b, c	*Pre-Stack Depth-Migration (raw) and semblance-scaled for dynamic compression (final) + velocities*

Output 10 a, b c	*Tomographic Inversion (unmuted, muted, ray-count)* ***Input are the first-break picks of the raw unstacked data***